


DC-2GHz 100W 移相器规格书


DC-2GHz 100W Phase Shifters Specification

(Model: PS-DC-2-100W-360)

指标项目 Items	技术指标 Technical	
频率 Frequency Range	DC-1GHz	DC-2GHz
最大驻波比 VSWR(max)	≤1.4	≤1.5
插入损耗 Insertion Loss	≤1.5 dB	≤2.0 dB
相位调节 Phase Range	0~360°	0~720°
阻抗 Impedance	50Ω	
平均功率 Average power	100W	
峰值功率 Peak power	5KW	
连接类型 Connector Type	N (F, F), SMA (F, F)	
连接器外壳 Connectors	黄铜镀镍 Brass Nickel Plated	
阳内导体 Female Pin	铍青铜镀金 Beryllium Copper Gold Plated	
腔体 cavity	铝外壳, 喷漆(宝蓝色) Aluminum, Blue Spray Painting	
温度范围 Temperature range	运行: -10℃~+50℃ 未运行: -40℃~+70℃	
外形尺寸 Size	模拟: 300.76×30.5mm 数字: 395×76×50.5mm	
重量 Weight	1800g	

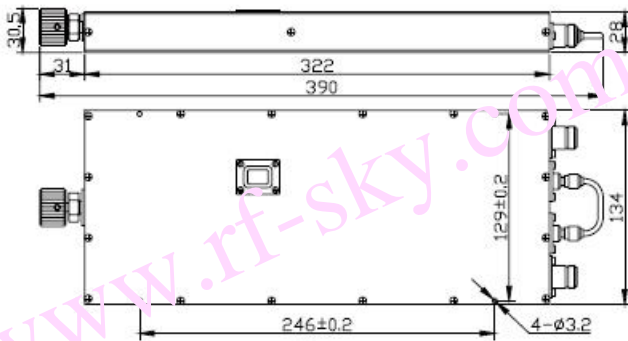

模拟

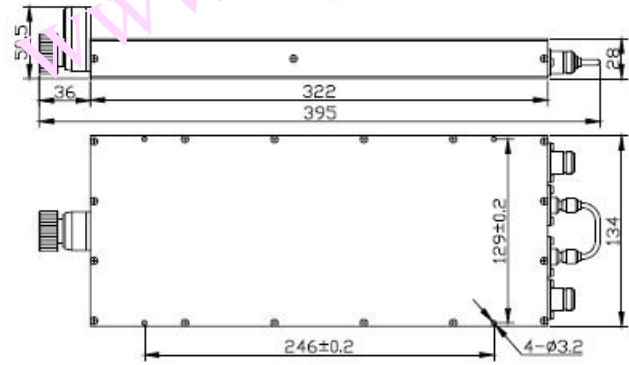

数字

