


DC-4GHz 100W 移相器规格书


DC-4GHz 100W Phase Shifters Specification

(Model: PS-DC-4-100W-180)

指标项目 Items	技术指标 Technical			
频率 Frequency Range	DC-1GHz	DC-2GHz	DC-3GHz	DC-4GHz
最大驻波比 VSWR(max)	≤1.1	≤1.5	≤1.5	≤1.5
插入损耗 Insertion Loss	≤1.0 dB	≤1.5 dB	≤1.75 dB	≤2.0 dB
相位调节 Phase Range	0~180°	0~360°	0~540°	0~720°
阻抗 Impedance	50Ω			
平均功率 Average power	100W			
峰值功率 Peak power	5KW			
连接类型 Connector Type	N (F, F), SMA (F, F)			
连接器外壳 Connectors	黄铜镀镍 Brass Nickel Plated			
阳内导体 Female Pin	铍青铜镀金 Beryllium Copper Gold Plated			
腔体 cavity	铝外壳, 喷漆(宝蓝色) Aluminum, Blue Spray Painting			
温度范围 Temperature range	运行: -10℃~+50℃ 未运行: -40℃~+70℃			
外形尺寸 Size	模拟: 272.7×30.5mm 数字: 277×76×50.5mm			
重量 Weight	795g			

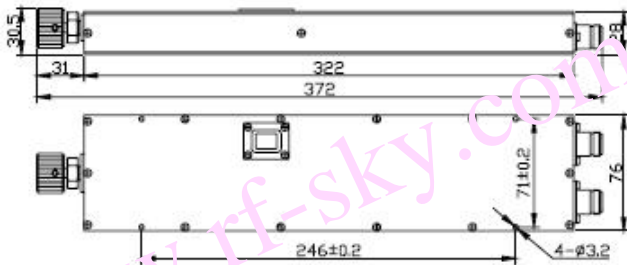

模拟

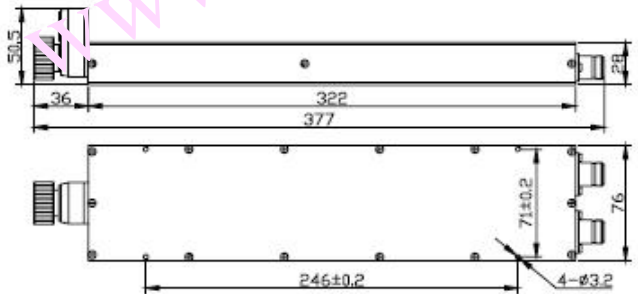

数字